


## 19" inch Rack Mount Touch Monitor

### Products application :

- Rack Mount
- Industrial PC
- Kiosk
- Medical apparatus
- Military equipment
- Communicate

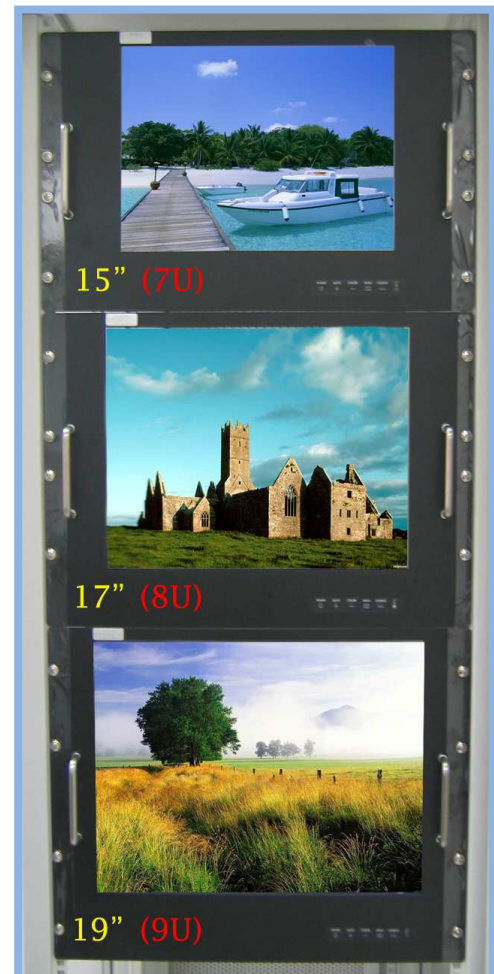

## 19" inch Rack Mount Touch Monitor

### Display Specifications :

Active Area	376 x 301 mm
Pixel Pitch	0.294 x 0.294 mm
Brightness	300 cd/m <sup>2</sup>
Contrast Ratio	1300 : 1
Resolution	1280 x 1024 ( SXGA )
Viewing Angle	L/R89°89° ; U/D89°89°
Response Time	8 ms ( Tr + Tf )
Display Colors	16.7M
Display Modes	640x350 ; 640x480 ; 720x400 ; 800x600 ; 1024x768 ; 1280x1024
Signal input	15 Pin D_Sub ; Mini-Audio in ; DVI-I
Mini-Audio out	1W ( 8Ω ) x 2
OSD Keyboard	⊙Power ⊙Auto adjust ⊙+ ⊙- ⊙Menu
Power Source	DC 12V ; ≥40w
Power Consumption	Standby ≥5w
Storage · Operation	-20~60°C ; 0~50°C
VESA	75x75 or 100x100 mm
Casing Colors	Black
Casing Size · Weight	398.5 x 326 x 50 mm ; 7 kg ( WxHxD )
Carton · gross weight	600 x 500 x 200 mm ; 8.5 kg ( WxHxD )



### Touch Feature :

Input Method	Finger, gloved hand, or stylus activation
Activation Force	≥50g
Linearity	≥1.5%
Surface	≤3H
Life Time	≤35,000,000
Application	Writing and Signature Capture Capability
PC Link	USB or RS232

### Software Feature :

Calibration	Fast full oriental 4 points position
Compensation	Edge compensation. Accuracy 25 points linearity compensation
Draw Test	Position and linearity verification
Controller	Support multiple controllers
Languages	English · Simple Chinese · Traditional Chinese · Japanese · French · German · Spanish · Korean · Arabic · Czech · Danish · Dutch · Greek · Hungarian · Italian · Norwegian · Russian · Polish · Portuguese · Slovenian · Swedish · Thai · Turkish
Mouse Emulator	Right / left button emulation. Auto Right / left Click ( PDA function )
Touch Style	Drawing a Mode · button a Mode · Touch Off/ on Switch
Double Click	Configurable double click speed · Configurable double click area
Sound Modes	No sound · Touch down · Touch up
COM Port Support	COM1 ~ COM255 for Windows and Linux COM1 ~ COM8 for MS- DOS
Display Support	display rotation · Support multiple monitors
Support O.S	All Windows-32 bit O.S Windows7 : VISTA : XP-64 bit O.S MS-DOS : All Linux : MAC



### Order information :

AIM-RM5R190-A05 :	【VGA/AUDIO/DVI-I/USB-TOUCH】	AIM-RM5R190-A06 :	【VGA/AUDIO/DVI-I/RS232-TOUCH】
Accessory	VGA Cable/AC90~260V Adapter/Power Cable/Audio Cable/USB or RS232 Cable/Touch Pen/ Cleaning wipes/Driver Disk		
	※DVI Cable(Optional)		

Warranty : 3-year warranty ( LCD Panel One Year free )



Dimensions :

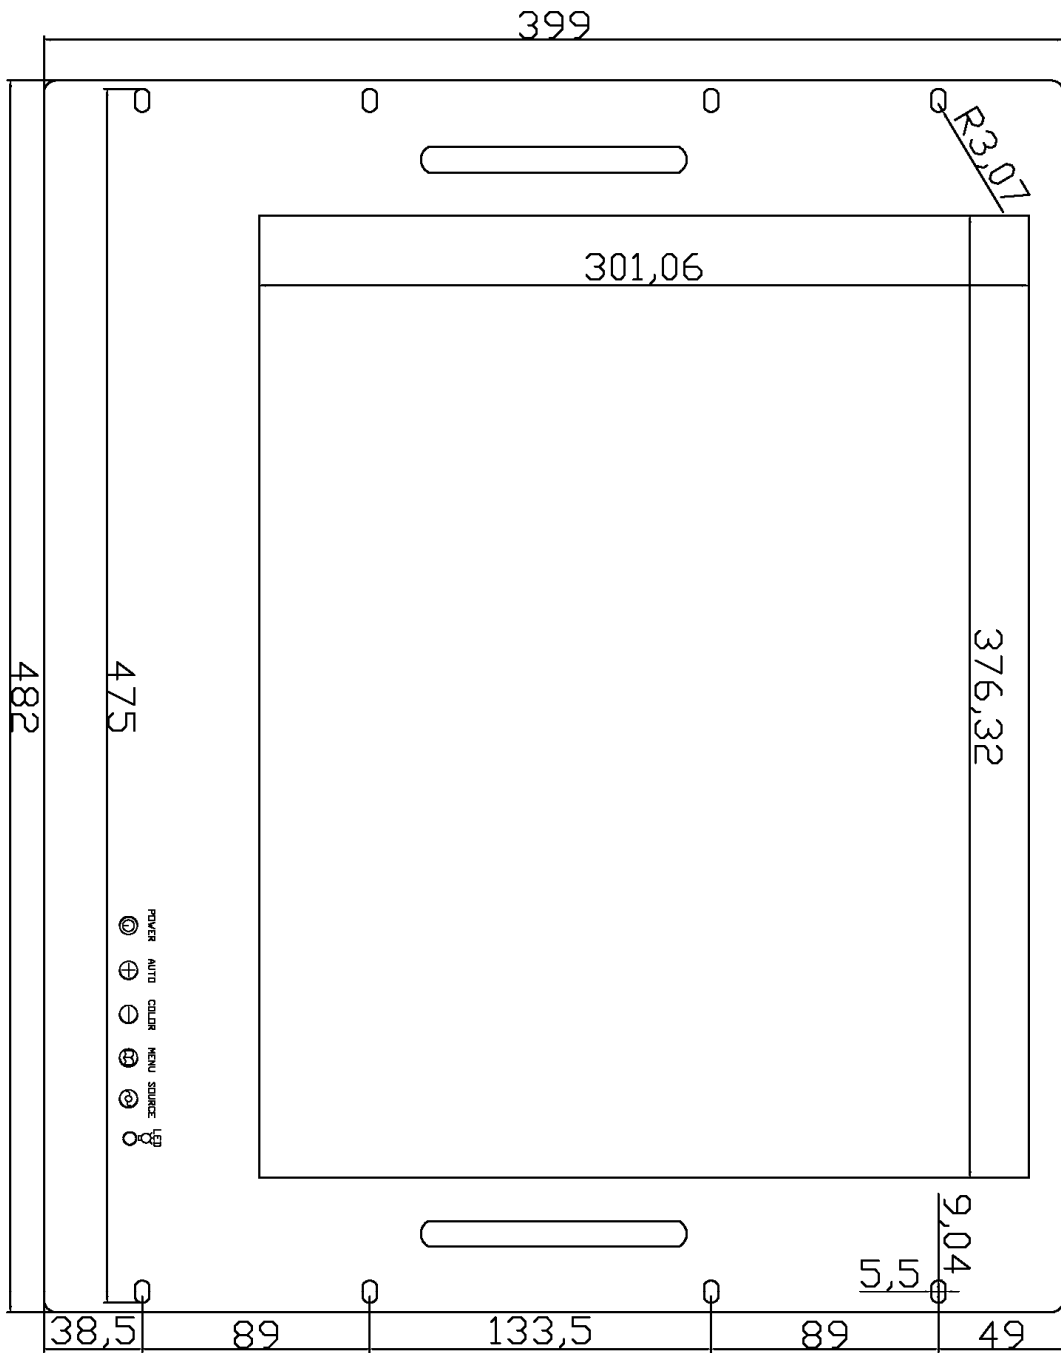

19吋 機架固定式 AIM-RM5R190-A05

