

24" inch Open Frame Touch Monitor

Products application :

- POS Terminal
- Industrial PC
- Kiosk
- Gaming
- Medical apparatus
- Personal computer
- Mobile GPS
- Office automation
- Security system of the house
- Car-mounted amusement
- Military equipment
- Communicate



22" inch Open Frame Touch Monitor

Display Specifications :

Active Area	531.4 × 298.9 mm
Pixel Pitch	0.27675 × 0.27675 mm
Brightness	300 cd/m ²
Contrast Ratio	1000 : 1
Resolution	1920 × 1080 (Full HD)
Viewing Angle	L/R85°/85° ; U/D80°/80°
Response Time	5 ms (Tr + Tf)
Display Colors	16.7M
Display Modes	640×350 ; 640×480 ; 720×400 ; 800×600 ; 1024×768 ; 1280×1024 ; 1360×768 ; 1440×900 ; 1680×1050 ; 1920×1080
Signal input	15 Pin D_Sub ; DVI-I ; Mini-Audio in
Mini-Audio out	1W (8Ω) × 2
OSD Keyboard	⊙Power ⊙Auto adjust ⊙+ ⊙- ⊙Menu
Power Source	DC 12V ; ≥50w
Power Consumption	Standby ≥5w
Storage \ Operation	-20~60°C ; 0~50°C
VESA	75×75 ; 100×100 mm
Casing Colors	Gray
Casing Size \ Weight	558.5 × 325.7 × 50 mm ; 6.3 kg (W×H×D)
Carton \ gross weight	700 × 400 × 180 mm ; 8.3 kg (W×H×D)



Touch Feature :

Input Method	Finger, gloved hand, or stylus activation
Activation Force	≥50g
Linearity	≥1.5%
Surface	≤3H
Life Time	≤35,000,000
Application	Writing and Signature Capture Capability
PC Link	USB or RS232


Software Feature :

Calibration	Fast full oriental 4 points position
Compensation	Edge compensation. Accuracy 25 points linearity compensation
Draw Test	Position and linearity verification
Controller	Support multiple controllers
Languages	English \ Simple Chinese \ Traditional Chinese \ Japanese \ French \ German \ Spanish \ Korean \ Arabic \ Czech \ Danish \ Dutch \ Greek \ Hungarian \ Italian \ Norwegian \ Russian \ Polish \ Portuguese \ Slovenian \ Swedish \ Thai \ Turkish
Mouse Emulator	Right / left button emulation. Auto Right / left Click (PDA function)
Touch Style	Drawing a Mode \ button a Mode \ Touch Off/ on Switch
Double Click	Configurable double click speed \ Configurable double click area
Sound Modes	No sound \ Touch down \ Touch up
COM Port Support	COM1 ~ COM255 for Windows and Linux COM1 ~ COM8 for MS- DOS
Display Support	display rotation \ Support multiple monitors
Support O.S	All Windows-32 bit O.S Windows7 ; VISTA ; XP-64 bit O.S MS-DOS ; A II Linux ; MAC



Order information :

AIM-TM5R240-A03W :	【VGA/AUDIO/DVI-I/USB-TOUCH】	AIM-TM5R240-A04W :	【VGA/AUDIO/DVI-I/RS232-TOUCH】
Accessory	VGA Cable / AC90~260V Adapter / Power Cable / Audio Cable / USB or RS232 Cable / Touch Pen / Cleaning wipes / Driver Disk		※DVI Cable(Optional)

Warranty : 3-year warranty (LCD Panel One Year free)



Dimensions :

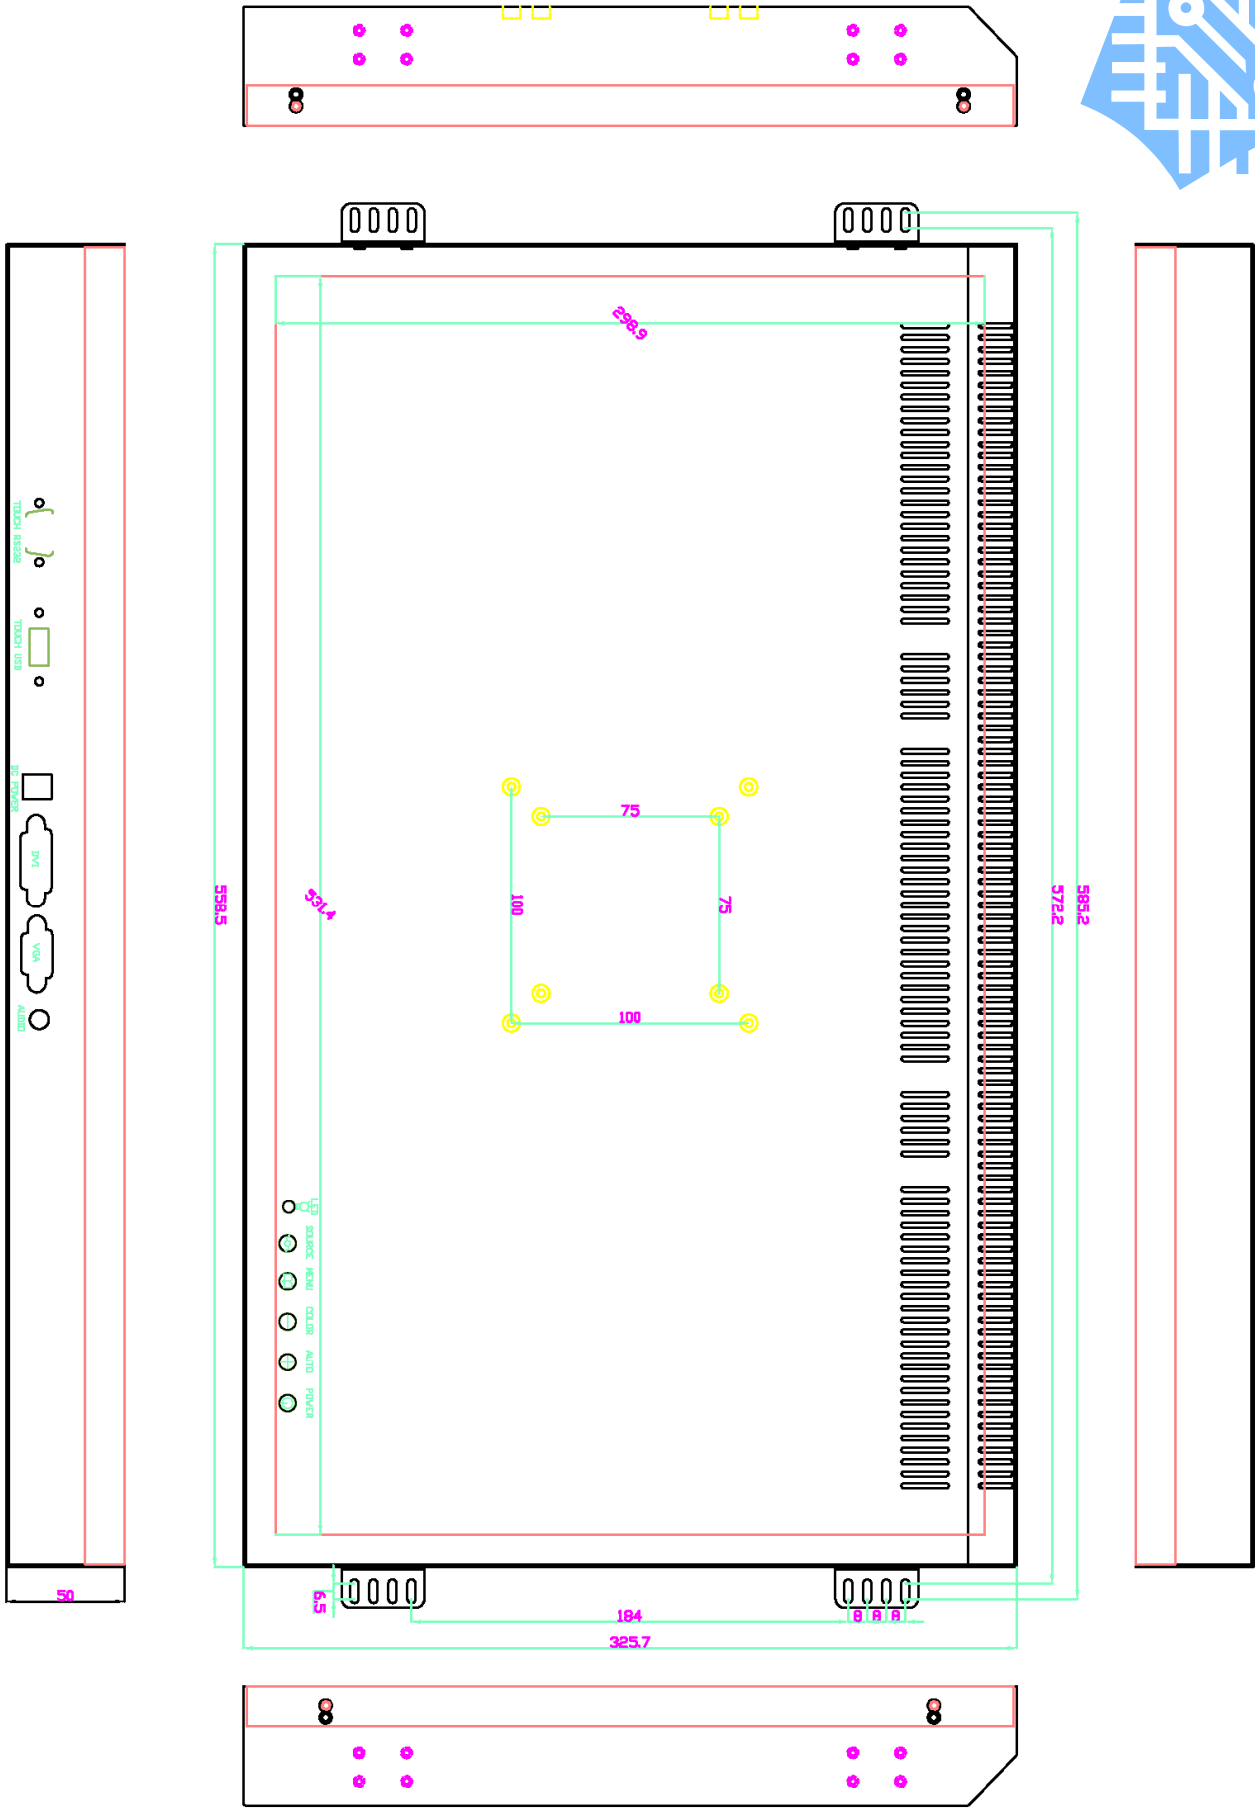

24吋_AIM-TM0P5R240-A03W

NOTE:
ALL DIMENSIONS ARE IN MILL METERS